



ALL SHORE INDUSTRIES, INC.

SPECIFICATION FOR LIQUID CRYSTAL DISPLAY MODULE

MODULE # : ASI_-164AS-LJ-_YS/W

- (1) NUMBER OF CHARACTER----- 16 CH * 4 LINE
- (2) MODULE SIZE-----87.0 W * 60.0 H * 15.0 T (Max) mm
- (3) EFFECTIVE AREA----- 61.8 W * 25.2 H mm
- (4) CHARACTER PATTERN----- 5 * 7 DOTS + CURSOR
- (5) CHARACTER SIZE-----2.96 W * 4.16 H mm
- (6) CHARACTER PITCH-----3.55 mm
- (7) DOT SIZE-----0.56 W * 0.56 H mm
- (8) DOT PITCH-----0.60 W * 0.60 H mm



MODEL NO : ASI_-164AS-LJ-_YS/W


RECORD OF REVISION

DATE	PAGE	SUMMARY



MODEL NO : ASI_-164AS-LJ-_YS/W

LCD MODULE PART NUMBERING SYSTEM

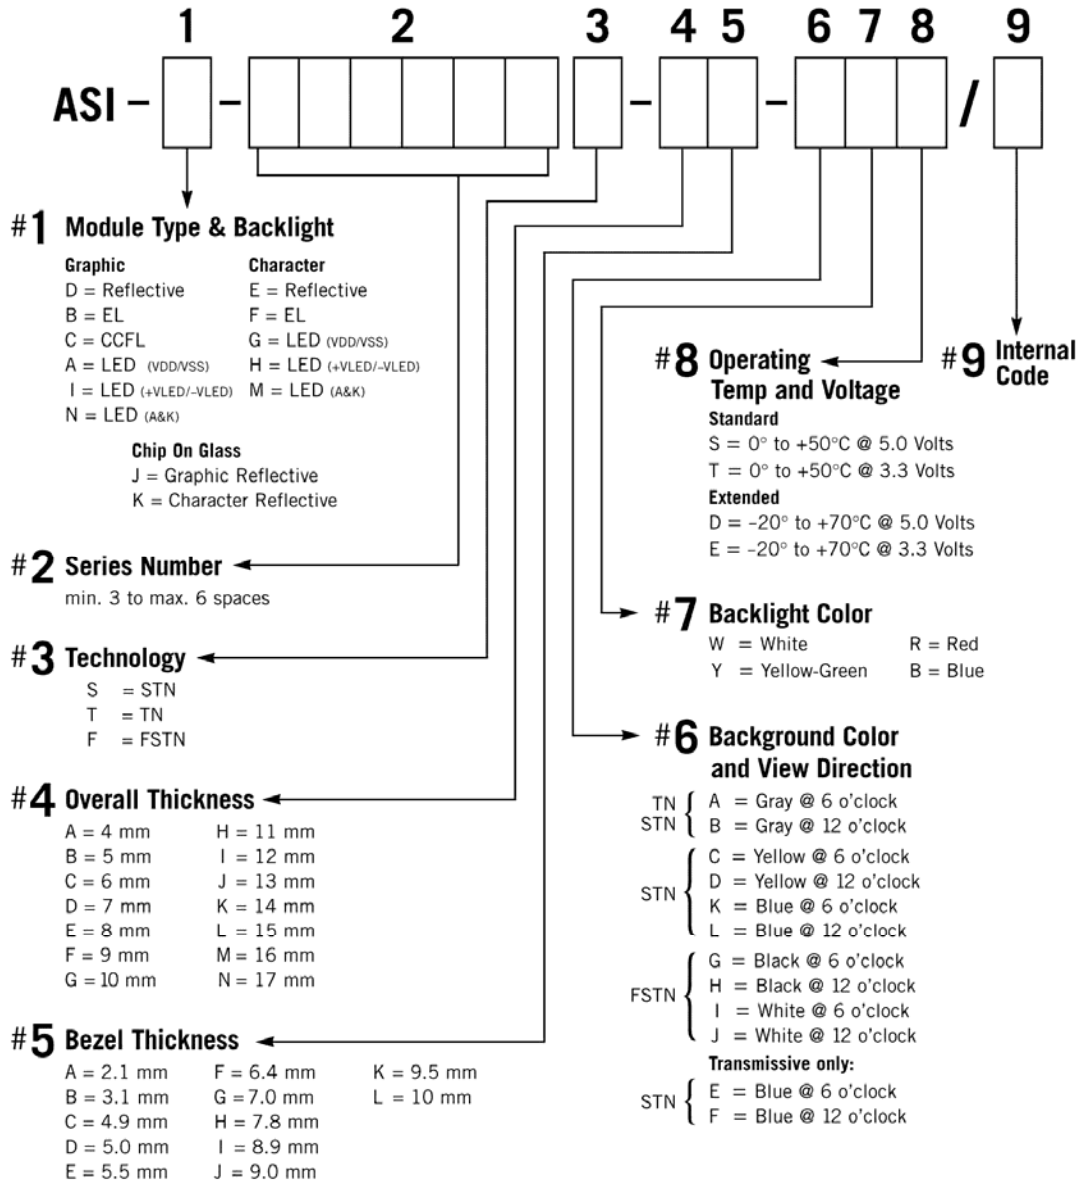

NOTE: Some options may not be available in specific modules. Please contact your Sales Representative to check availability.



MODEL NO : ASI_-164AS-LJ-_YS/W

General specifications

General specifications

PLEASE REFER TO:

“CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS (MS-10-0069)”

This individual specification is prior to general specifications

Mechanical data

- (1) NUMBER OF CHARACTER----- 16 CH * 4 LINE
- (2) MODULE SIZE----- 87.0 W * 60.0 H * 15.0 T (Max) mm
- (3) EFFECTIVE AREA----- 61.8 W * 25.2 H mm
- (4) CHARACTER PATTERN----- 5 * 7 DOTS + CURSOR
- (5) CHARACTER SIZE----- 2.96 W * 4.16 H mm
- (6) CHARACTER PITCH----- 3.55 mm
- (7) DOT SIZE----- 0.56 W * 0.56 H mm
- (8) DOT PITCH----- 0.60 W * 0.60 H mm



MODEL NO : ASI_-164AS-LJ-_YS/W

Absolute maximum ratings

Electrical absolute maximum ratings

<i>I T E M</i>	<i>SYMBOL</i>	<i>MIN.</i>	<i>MAX.</i>	<i>UNIT</i>	<i>COMMENT</i>
POWER SUPPLY FOR LOGIC	V _{DD} -V _{SS}	0	6.0	V	-----
INPUT VOLTAGE	V _I	V _{SS}	V _{DD}	V	-----
STATIC ELECTRICITY	-----	-----	100	V	NOTE(1)
POWER SUPPLY FOR B.L	V _{LED}	-----	5.0	V	-----

NOTE (1): ELECTRO-STATIC DISCHARGE RESISTANCE IS TESTED BY CHARGING A 200PF CAPACITOR AND DISCHARGING IT BY CONTACT WITH A INTERFACE CONNECTOR PIN.

Environmental absolute maximum ratings

<i>I T E M</i>	<i>CONDITION</i>	<i>OPERATION</i>		<i>STORAGE</i>		<i>COMMENT</i>
		<i>MIN.</i>	<i>MAX.</i>	<i>MIN.</i>	<i>MAX.</i>	
AMBIENT TEMPERATURE	NORMAL	0°C	50°C	-20°C	70°C	-----
	WIDE	-20°C	70°C			
HUMIDITY	-----	NOTE (3)		NOTE (3)		NO CONDENSATION
VIBRATION NOTE (3)	-----	-----	0.5G	-----	2G	10~300Hz XYZ DIRECTIONS 1 Hr EACH
SHOCK NOTE (4)	-----	-----	3G	-----	50G	10 msec XYZ DIRECTIONS 1 TIME EACH
CORROSIVE GAS	-----	NOT ACCEPTABLE		NOT ACCEPTABLE		-----

NOTE (3): Ta ≤ 50°C: 90% RH MAX.

Ta > 50°C: ABSOLUTE HUMIDITY MUST BE LOWER THAN THE HUMIDITY OF 90% RH AT 50°C. (80%RH AT 60°C)

NOTE(4): 1G=9.8m/s²



MODEL NO : ASI_-164AS-LJ-_YS/W

Electrical characteristics

$$T_a = 25^{\circ}\text{C} \quad V_{DD} = 5.0\text{V} \pm 0.25\text{V}$$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
INPUT VOLTAGE	V _{IH}	-----	2.2	-----	-----	V	
	V _{IL}		-----	-----	0.6	V	
OUTPUT VOLTAGE	V _{OH}	-I _{OH} = 0.2 mA	2.4	-----	-----	V	
	V _{OL}	I _{OL} = 1.2 mA	-----	-----	0.4	V	
POWER SUPPLY CURRENT	I _{DD}	V _{DD} = 5.0V	-----	2.0	3.0	mA	
RECOMMENDED LCD DRIVING VOLTAGE, NOTE(1)	V _{DD} -V _O	STN/ FSTN DUTY =1/16 Φ=10° NOTE(2)	T _a =-20°C	-----	4.8	-----	V
			T _a = 0°C	-----	4.7	-----	V
			T _a = 25°C	-----	4.5	-----	V
			T _a = 50°C	-----	4.3	-----	V
			T _a = 70°C	-----	4.2	-----	V
		TN DUTY =1/16 Φ=25° NOTE(2)	T _a =-20°C	-----	4.5	-----	V
			T _a = 0°C	-----	4.4	-----	V
			T _a = 25°C	-----	4.2	-----	V
			T _a = 50°C	-----	4.0	-----	V
			T _a = 70°C	-----	3.9	-----	V
POWER SUPPLY CURRENT FOR B.L	I _{LED}	V _{LED} =5.0V	-----	170	220	mA	

NOTE (1): RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT $\pm 0.5\text{V}$ BY EACH MODULE.

(2): $\theta = 0^{\circ}$: VIEWING DIRECTION AT 6 O'CLOCK
 $\theta = 180^{\circ}$: VIEWING DIRECTION AT 12 O'CLOCK



MODEL NO : ASI_-164AS-LJ-_YS/W

Optical characteristics

TN TYPE LCD

$$T_a = 25^{\circ}\text{C} \quad V_{DD}-V_O = 4.2\text{V}$$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
VIEWING ANGLE	$\Phi 2-\Phi 1$	K = 1.4 NOTE(1)	20	30	----	deg.	NOTE(2)
CONTRAST RATIO	K	$\Phi = 25^{\circ}$ NOTE(1)	2.0	3.0	----	----	NOTE(2)
RESPONSE TIME	tr (rise)	$\Phi = 25^{\circ}$ NOTE(1)	----	150	250	ms	NOTE(2)
	tf (fall)	$\Phi = 25^{\circ}$ NOTE(1)	----	150	250	ms	NOTE(2)

STN TYPE LCD

$$T_a = 25^{\circ}\text{C} \quad V_{DD}-V_O = 4.5\text{V}$$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
VIEWING ANGLE	$\Phi 2-\Phi 1$	K = 2.0 NOTE(1)	30	40	----	deg.	NOTE(2)
CONTRAST RATIO	K	$\Phi = 10^{\circ}$ NOTE(1)	3.0	4.0	----	----	NOTE(2)
RESPONSE TIME	tr (rise)	$\Phi = 10^{\circ}$ NOTE(1)	----	200	350	ms	NOTE(2)
	tf (fall)	$\Phi = 10^{\circ}$ NOTE(1)	----	300	400	ms	NOTE(2)

FSTN TYPE LCD

$$T_a = 25^{\circ}\text{C} \quad V_{DD}-V_O = 4.5\text{V}$$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
VIEWING ANGLE	$\Phi 2-\Phi 1$	K = 2.0 NOTE(1)	30	40	----	deg.	NOTE(2)
CONTRAST RATIO	K	$\Phi = 10^{\circ}$ NOTE(1)	4.0	5.0	----	----	NOTE(2)
RESPONSE TIME	tr (rise)	$\Phi = 10^{\circ}$ NOTE(1)	----	200	350	ms	NOTE(2)
	tf (fall)	$\Phi = 10^{\circ}$ NOTE(1)	----	300	400	ms	NOTE(2)

Brightness for LCM backlight

SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	B.L TYPE	NOTE
B	$\Phi = 0^{\circ}$ $\theta = 0^{\circ}$	5.0	----	----	cd/m ²	ARRAY LED	NOTE(2) NOTE(3)

NOTE (1): $\theta = 0^{\circ}$: VIEWING DIRECTION AT 6 O'CLOCK


$\theta = 180^{\circ}$: VIEWING DIRECTION AT 12 O'CLOCK

NOTE (2):SEE CUSTOMER ACCEPTANCE STANDARD SPECIFICATION FOR DEFINITION OF OPTICAL CHARACTERISTICS.

NOTE (3):UNDER NORMAL TEMPERATURE AND HUMIDITY IN A DARK ROOM.

MODEL NO : ASI_-164AS-LJ-_YS/W

8. Outline dimension

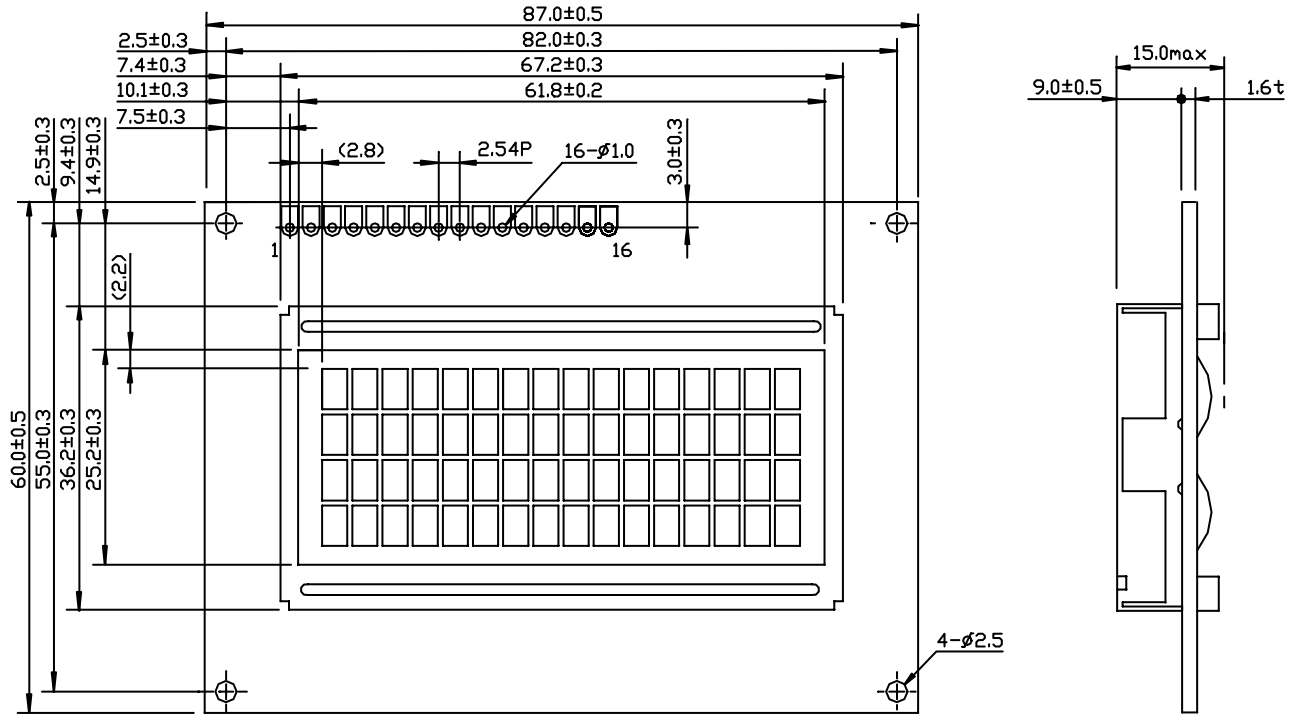


Interface pin connection

<i>PIN NO.</i>	<i>1</i>	<i>2</i>	<i>3</i>	<i>4</i>	<i>5</i>	<i>6</i>	<i>7</i>	<i>8</i>
SYMBOL	V _{SS}	V _{DD}	V _O	RS	R/ \bar{W}	E	DB0	DB1
<i>PIN NO.</i>	<i>9</i>	<i>10</i>	<i>11</i>	<i>12</i>	<i>13</i>	<i>14</i>	<i>15</i>	<i>16</i>
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	A	K




MODEL NO : ASI_-164AS-LJ-_YS/W

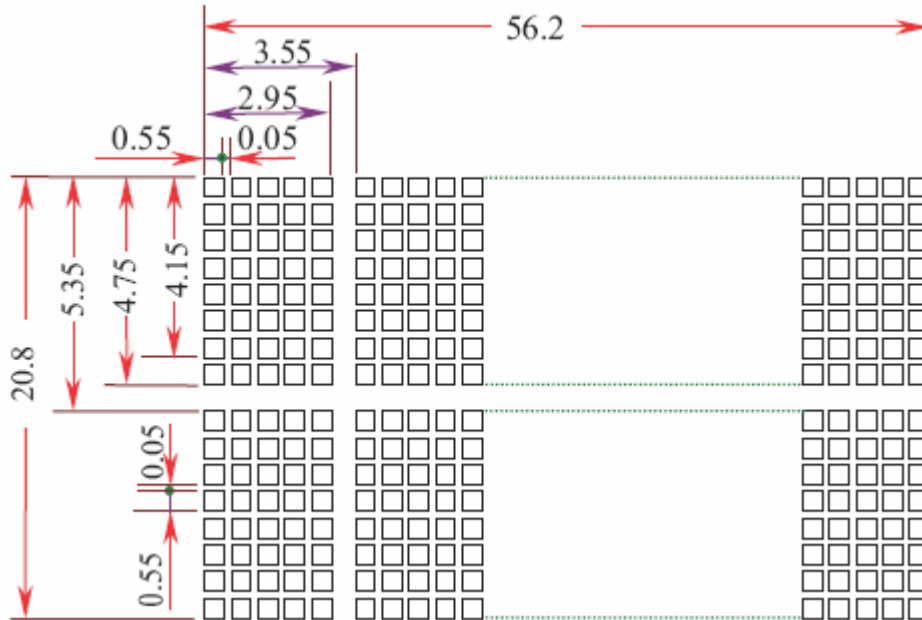



MODEL NO : ASI_-164AS-LJ-_YS/W


. Block diagram

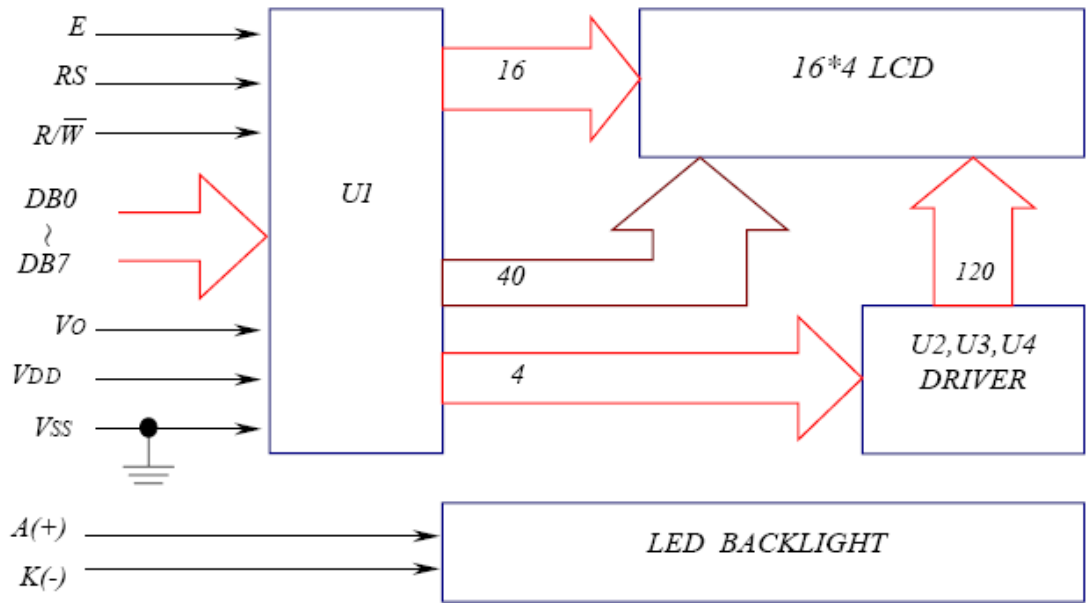

Display data address charts ⚠

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
LINE 1	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
LINE 2	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F
LINE 3	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F
LINE 4	50	51	52	53	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F

MODEL NO : ASI_-164AS-LJ-_YS/W

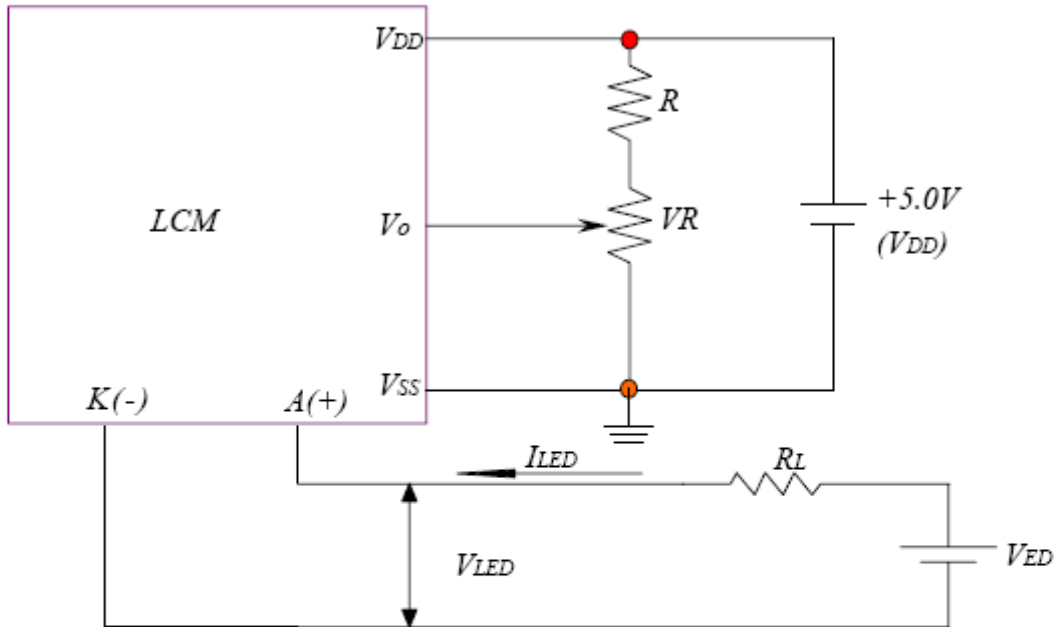Power supply for LCMRECOMMENDED RESISTOR R: $V_{DD}-V_o \geq 1.5V$ $V_{DD}-V_o$: LCD DRIVING VOLTAGEVR: $10K\Omega \sim 20K\Omega$

ITEM	LED TYPE	CONDITION
Limit resistor of LED (R_L)	ARRAY LED	$R_L \geq ((V_{ED} - 5.0V) / I_{LED})$, $I_{LED} \leq 220mA$

The information presented in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Information contained herein is for selection purposes only, and is subject to change without notice. Please contact ASI for current datasheets prior to designing.